

APPENDIX E TYPICAL INFRASTRUCTURE RECOMMENDATIONS

The following infrastructure recommendations are typical treatments used in SRTS projects. These recommendations may or may not be included in this travel plan. The basic information is provided to give an overall understanding and implementation guidance on each treatment.




Rectangular Rapid Flashing Beacons:

Rectangular rapid flashing beacons (RRFB), as shown to the left, are warning beacons used to increase visibility of students and all pedestrians as they cross the roadway at uncontrolled crosswalks. This type of signal is pedestrian-activated, i.e., the signal will only flash if a pedestrian has pushed a button, indicating that they need to cross the street. Any proposed RRFB locations need to meet current guidance provided in the interim approval of the MUTCD. For proposed uncontrolled crosswalks on state maintained roads, VTrans approval and justification are needed.

Curb Extensions:

Curb extensions, as shown below, are recommended to reduce pedestrian crossing distances (and thus exposure to traffic) and to slow motor vehicle turning speeds at intersections. Curb extensions located along school bus routes should effectively calm traffic, but not impede buses from making the turn. Design considerations should include the appropriate design vehicle, maintenance concerns, and snow plow accommodations depending on the roadway jurisdiction.

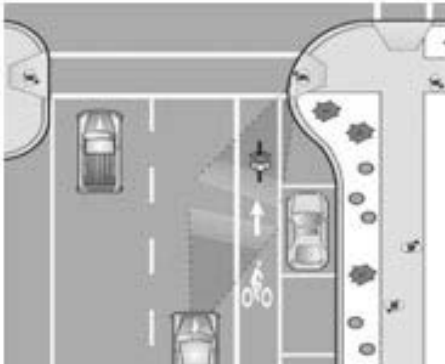

Curb Radius Reductions:



Curb radius reductions are recommended to slow motor vehicle turning speeds and to reduce pedestrian crossing distances (and thus exposure to traffic). Curb radius reductions involve tightening the motor vehicle turning radius at an intersection, as shown to the left, without extending the curb line into a parking lane. Curb radius reductions located along school bus routes should effectively calm traffic but not impede buses from making the turn. Design considerations for curb radius reductions include the appropriate design vehicle depending on the roadway jurisdiction and ADA compliance.


High Visibility Crosswalks:

High visibility crosswalk striping improves the visibility of pedestrians to motorists. Different striping patterns can be used and the most common patterns are variations of the ladder style, shown right. Reflective durable materials should be used to resist decay.



Sidewalks and buffers:

One of our long-term goals is to establish a well-connected sidewalk network throughout the neighborhoods so that families can walk for more of their daily trips, rather than drive. Sidewalks are the most effective when they include a buffer. This buffer increases pedestrian comfort and safety and can also serve as a place for pedestrian “overflow”, especially closer to the school where groups of walkers are largest. Based on Vermont Pedestrian and Bicycle

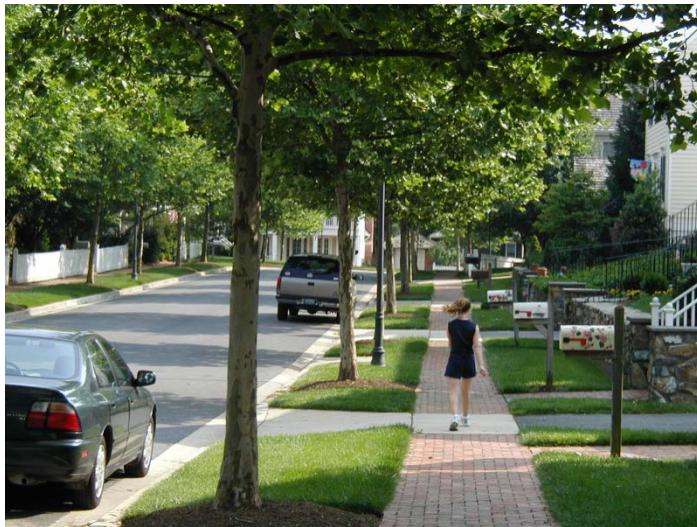

Facility Planning and Design Manual, the preferred design for sidewalks is a minimum six foot wide sidewalk with a minimum two foot wide buffer for local roadways with curbs. For downtowns and village centers on roadways with curbs, the preferred design for sidewalks is a minimum eight foot wide sidewalk with a minimum four foot wide buffer. For roadways without curbs, the buffer should be a minimum of five feet. Available right of way will impact the ultimate design of the sidewalk.

School Zone Identification:

School pavement markings are recommended to alert motorists that they are entering a school zone where pedestrians may be present both along and crossing the roadway. New pavement markings can work with existing school zone signs to reinforce the message to motorists about the school zone. The detail provided in the figure below is an excerpt of the MUTCD.

Figure 7C-1. Two-Lane Pavement Marking of "SCHOOL"



Speed Feedback Signs:

Communities may use a mobile "speed trailer" that can be placed in locations where motorists exceed the speed limit often enough that passive enforcement is appropriate. Permanently installed feedback signs, shown right, provide ongoing information to motorists about the speed at which they are traveling. SRTS recommended any potential feedback signs be strategically located at main access points.



For towns interested in reducing the speed limit of a roadway, an engineering study needs to be conducted by the town. Approval from VTTrans is needed for state maintained roads.

Median Refuge Island:

A median refuge island, as shown right, may be used to narrow the roadway, reduce motor vehicle speeds, and improve pedestrian crossings. In locations with crosswalks, these islands improve pedestrian safety and access by reducing crossing distances and enable pedestrians to cross roadways in two stages. Design considerations for median refuge islands should include ADA compliance, maintenance concerns, and snow plow accommodations.

